


SPECIFICATIONS

Lift capacity	6,000 lbs	2,721kg
Max lift height	30' 7"	9.19m
Forward reach	18' 5"	5.61m
Frame leveling L/R	NA	
Weight*	13,700 lbs	6,214kg
Engine (Deutz 2.9L)	74hp (Tier 4F)	
Axles	Comer 128	
Transmission	Linde	
Fuel capacity	26 gal	98.4L
Tires	12.5/80-18 Pneumatic	
Hydraulic flow (per min)	26 gal	98.4L
Hydraulic pressure	3,500 psi	241.3bar
Hydraulic oil capacity	50 gal	189.2L
Length to fork face	16' 3"	4.9m
Width	78"	1.9m
Height	7'	2.1m
Wheelbase	116"	2.9m
Ground clearance	14"	355mm
Turning radius	11'	3.3m

*Weight based on open cab model with foam filled tires.

LOAD CAPACITY CHART

XR630-A LOAD CHART FIXED CARRIAGE

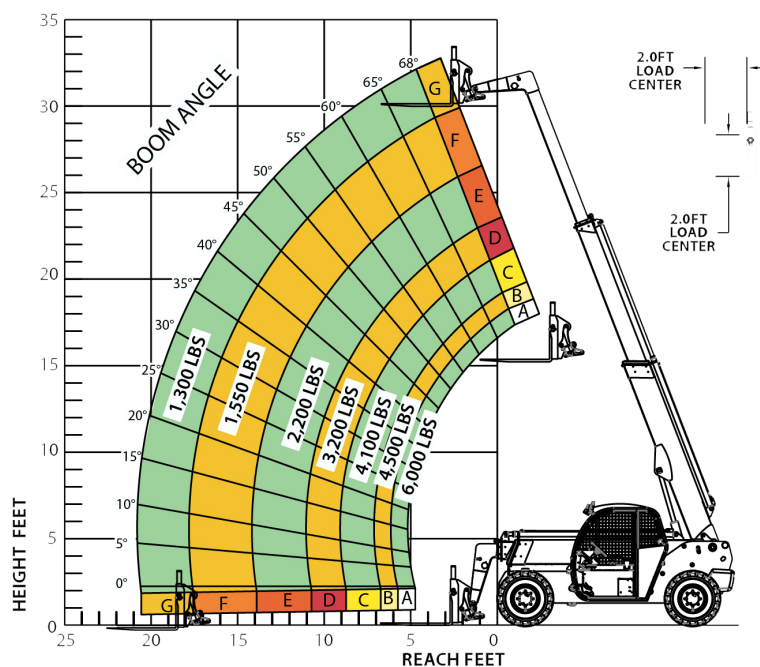

LOAD RATINGS ARE FOR VEHICLES EQUIPPED WITH AIR FILLED TIRES.
LOAD RATING INCLUDES WEIGHT OF ANY RIGGING.
3,000 LBS AT 24" MIN CAPACITY FORK (6,000 LBS PAIR).



STANDARD FEATURES

360° operator visibility	Plastic fenders
Large cross section boom w/wear pads	Easy cab mounted grab handles
Easy service access	Tier 4 final compliant engine
Steel hydraulic & fuel tanks	Solid steel plate chassis
Plastic dash with display screen	Melonite pins
Linde hydrostatic 2 speed transmission	Machine lift points
Front and rear limited slip axles	

XR630 LOAD CHART - 72 INCH FIXED CARRIAGE

72" JIB BOOM - MAX CAPACITY: 2500 LBS

WEIGHT: 230 LBS CGx=35.2in

LOAD RATINGS ARE
FOR VEHICLE EQUIPPED
WITH AIR FILLED, FOAM
FILLED OR SOLID TIRES.

LOAD INCLUDES
WEIGHT OF ANY RIGGING

3,000 LBS AT 24 IN
MIN CAPACITY FORK
(6,000 LBS PAIR).

JIB BOOM SHALL ONLY
BE USED WITH 48 IN OR
42 IN FORKS

XTREME
MANUFACTURING

702-636-2969 • 800-497-1704

P/N 17422-002

